

PAT-8517  
MOCHA




PAT-8501  
ADOBE WHITE

PAT-8602  
OATMEAL

PAT-8504  
SAND

PAT-8603  
LARK

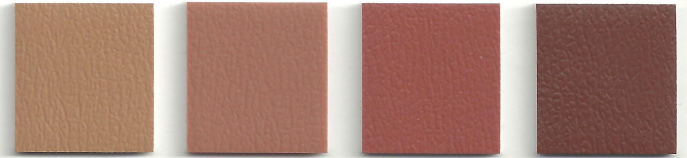


PAT-8506  
PUTTY

PAT-8610  
SABLE

PAT-8611  
TERRA COTTA

PAT-8516  
CHESTNUT

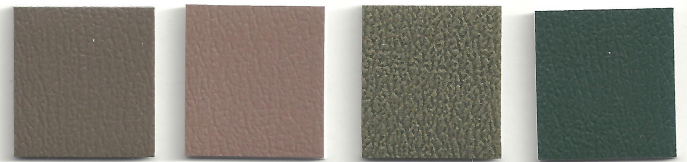


PAT-8626  
EUCALYPTUS

PAT-8584  
TAUPE

PAT-8625  
CYPRESS

PAT-8553  
YEW GREEN

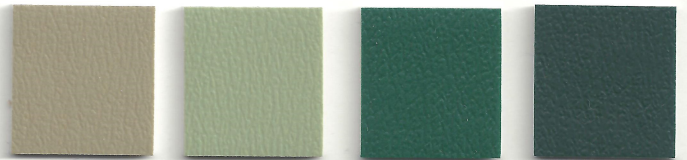

PAT-8623  
SAGE

PAT-8624  
GRANNY SMITH

PAT-8571  
FOREST

PAT-8581  
DARK AQUA



PAT-8620  
PEACOCK

PAT-8628  
SEA

PAT-8560  
AQUA GREY

PAT-8564  
GROTTO




PAT-8546  
COLONIAL BLUE

PAT-8572  
BLUERIDGE

PAT-8539  
GUNMETAL

PAT-8605  
CHARCOAL

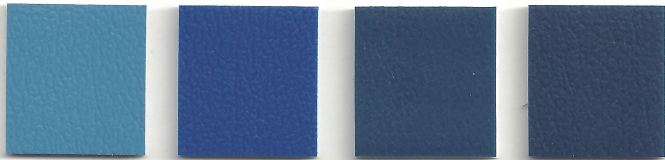

PAT-8541  
SPACE BLUE

PAT-8542  
ROYAL

PAT-8544  
SAPPHIRE

PAT-8582  
IMPERIAL BLUE



PAT-8547  
MIDNIGHT BLUE

PAT-8576  
DEEP PHOENICIAN

PAT-8618  
AUBERGINE

PAT-8540  
BLACK




PAT-8567  
DOVE

PAT-8604  
CONCRETE

PAT-8561  
MULBERRY

PAT-8615  
BERRY

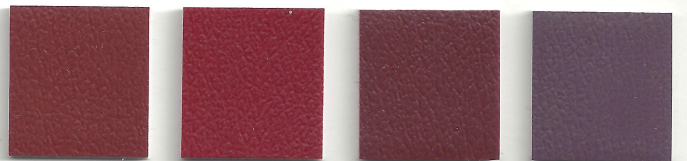


PAT-8533  
PORT

PAT-8532  
BORDEAUX

PAT-8569  
BURGUNDY

PAT-8577  
PURPLE GREY

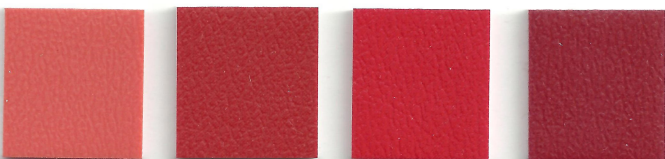


PAT-8613  
ORANGE KIST

PAT-8614  
SALSA

PAT-8528  
AMERICAN BEAUTY

PAT-8529  
PAPRIKA

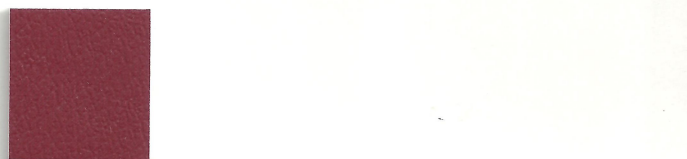

PAT-8579  
RUBY

# PATRIOT PLUS™ NEO

## Content

Vinyl

## Backing

Polyester | Cotton

## Finishes

**PERMABLOK®**  
ADVANCED VINYL PROTECTION

## Characteristics

Bleach Cleanable (1:9)\*\*  
Cleanable  
Stain Resistant  
Water Resistant

## Environmental

AB 2998 Compliant  
Formaldehyde Free  
No Biocides  
No Flame Retardants  
No Heavy Metals  
Prop 65 Compliant

## Performance

Anti-Static  
ASTM D-257

Cold Crack -20°F  
CFFA-6a

Sulfide Stain Resistant  
Fisher Body TM 31-12

Superior Abrasion  
CFFA-1a / ASTM D-4157  
100,000 Cycles, Wyzenbeek #10 Cotton Duck

UV Stability  
Xenotest: AATCC TM 16-3 / NTC 1479 /  
CFFA-2a - Blue Wool  
1,000 Hours



This fabric meets or exceeds these  
ACT performance guidelines.

\*Certification Marks owned by ACT®

## Flame Retardancy\*

California T.B. 117 - 2013

FMVSS 302

NFPA 260 - Cover Fabric - Class I

UFAC Fabric - Class I

\*This term and any corresponding data refer to the  
typical performance in the specific tests indicated and  
should not be construed to imply the behavior of this or  
any other material under actual fire conditions.

## Specifics

Weight: 34 oz.

Width: 54 in.

Roll Size: 30 yd.

## Applications

- Automotive | RV
- Education
- Healthcare
- Office
- Hospitality
  - Hotel | Motel | Casino
  - Restaurant
  - Public Spaces

## Marine

- Interior
- Exterior

## Residential

- Interior
- Exterior

## PERMABLOK CLEANING GUIDE



We recommend cleaning at least once a week to extend the lifespan of the upholstery, which will prevent dirt and contamination buildup and permanent staining. In the event of a spill, wipe off any excess right away with a dry white cloth or fabric, but careful not to spread to remaining surface.



Clean the whole surface in a circular motion using liquid hand soap (pH neutral) and water (1 part soap to 9 parts water). Check the Approved Cleaners guide for recommended cleaning products. Wipe with a clean damp cloth to get rid of any excess soap. Repeat as needed and then let dry.



If there is any buildup that cannot be removed with soapy water, a mixture of 1 part isopropyl alcohol to 9 parts water can be used as a last resort. (Remember, using alcohol on a regular basis can affect the properties of the product).



Once a month, you can use a soft-bristle brush for a deeper cleaning. Remember, light colors need more care, more often.

**Note:** The cleaning products recommended were used in a laboratory setting. Spradling Group® has no relationship with the manufacturers of those cleaning products.

### For Color Transfer

Certain clothing and accessory dyes (such as those used on denim jeans) may migrate to lighter colors. This phenomenon is increased by humidity and temperature and is irreversible. Please check compatibility when using this product in combination with painted or varnished surfaces.

### \*\*Disinfectants

In addition to cleaning, healthcare facilities maintain disinfecting regimens to reduce the spread of infections. There is a wide variety of available biocides that include bleaches, peroxides and quaternary ammonium products, among others. They should always be used at the recommended dilution, never in concentrated form. To prolong the life of coated fabrics, the disinfectants should be rinsed off after each use. It should be noted that misuse of disinfectants is the major source of surface deterioration. Spradling International, Inc.® continually evaluates cleaners/disinfectants, and a list of those tested can be found on our website.

**Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.**

Permablok® is a registered trademark of Spradling Holdings, Inc.  
Patriot Plus™ Neo is a trademark of Spradling Holdings, Inc.

©2022 Spradling International, Inc.®

4/2022

**CFFA** CHEMICAL FABRICS & FILM  
ASSOCIATION, INC.



**miami**™  
CORPORATION

miamicorp.com | 800.543.0448

