

## AS Standards

	Commercial 95 340	Commercial 95 340 FR
<b>Performance</b>		
Maximum force	warp 670 N/50mm	580 N/50mm
Elongation at max. force	warp 117%	98%
Maximum force	weft 2400 N/50mm	2000 N/50mm
Elongation at max. force	weft 83%	71.5%
Breaking force	warp 990 N	930 N
Breaking force	weft 2000 N	2000 N
Tear strength	warp 184 N	194 N
Tear strength	weft 347 N	282 N
Bursting pressure	3500 kPa	3600 kPa
Bursting force	1937 N	1944 N
<b>Fabric Properties</b>		
Nominal Fabric Mass	340 gsm ± 20	340 gsm ± 20
<b>Roll Specification</b>		
Width	3m (folded)	3m (folded)
Length	40m	40m
<b>Flammability Info</b>		
	Flammability Index - 12	Flammability Index - 1
	Ingnitability Index - 10	Ingnitability Index - 13
	Spread of Flame Index - 7	Spread of Flame Index - 8
	Heat Evolved Index - 5	Heat Evolved Index - 3
	Smoke Developed Index - 4	Smoke Developed Index - 6

## ASTM Standards

	Commercial 95 340	Commercial 95 340 FR
<b>Performance</b>		
Maximum force	warp 189.1 lbf	158.6 lbf
Elongation at max. force	warp 103.67%	88.7%
Maximum force	weft 462.3 lbf	412.3 lbf
Elongation at max. force	weft 63%	49%
Breaking force	warp 52.2 lbf	43 lbf
Breaking force	weft 52.2 lbf	39.6 lbf
Tear strength		
Tear strength	422 lbf	408 lbf
<b>Fabric Properties</b>		
Nominal Fabric Mass	340 gsm ± 20	340 gsm ± 20
<b>Roll Specification</b>		
Width	9 ft. 10 in. (folded)	9 ft. 10 in. (folded)
Length	131 ft. 3 in.	131 ft. 3 in.
<b>Flammability Info</b>		
	ASTM E84 19B Class A	CSFM Title 19 1237.1
		NFPA 701 Test Methods 1&2
		ASTM E84 19B Class A

Commercial  
**NinetyFive**  
340

Commercial  
**NinetyFive**  
340FR

The most trusted  
HDPE shade  
fabric in the  
industry.



Architectural  
**SHADE FABRIC**

Tension Structures  
Awnings  
Shade Sails  
Car Park Structures



\*The results listed in this brochure are typical averages from independent testing and quality assurance testing and are not to be taken as a minimum specification nor as forming any contract between GALE Pacific and another party. Due to continuous product improvement, refer to the GALE Pacific Commercial Fabrics website for latest technical performance information.

<sup>1</sup> Please note, Check with your local waste handler to confirm recyclability

<sup>2</sup> Please note, Oeko-Tex & Greenguard applicable to non FR products only

\* Please note, due to limitations of the printing process, colors pictured may not represent the true color



**miami**<sup>TM</sup>  
CORPORATION

miamicorp.com

| 800.543.0448


# Commercial NinetyFive 340

**Commercial Ninety-Five 340 delivers the utmost in versatility across a wide range of applications.**

Provides the optimal combination of sun protection, strength and durability to ensure low maintenance and long-life performance.

The most expansive color assortment in the HDPE shade fabric market. Offering 22 rich, vibrant and on-trend colors to fulfill a wide range of design requirements.

A mid-weight fabric (340 gsm) suitable for applications spanning a wide array of sizes and designs, making Commercial Ninety-Five 340 one of the most versatile HDPE shade fabrics in the industry.

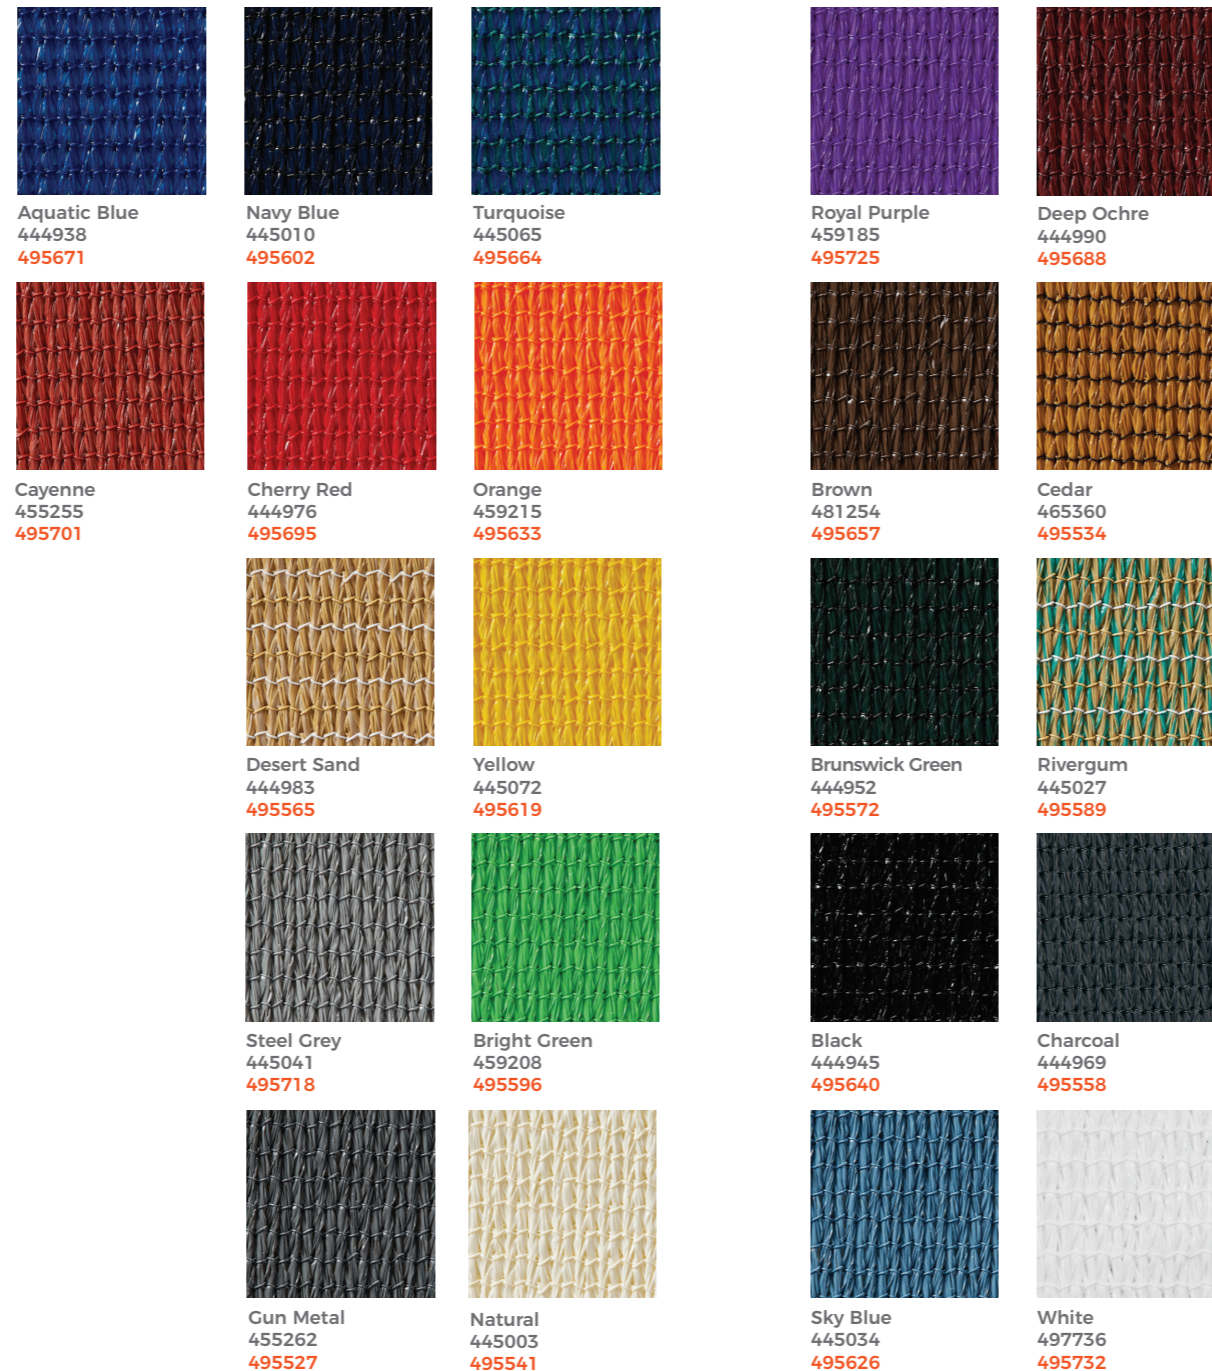

# Commercial NinetyFive 340FR

**Durability and FR compliance are now combined to create premium fabrics providing maximum performance.**

Only GALE Pacific offers the **WIDEST RANGE of FLAME RETARDANT** knitted fabrics globally.

Our FR fabrics meet the most stringent Fire Standards for shade fabrics including CSFM 1237.1 & NFPA 701 across all color variants. Offering premium biaxial stability and tensile properties, for minimal maintenance and improved fabric life.



Backed by a full 10-year warranty against UV degradation

Designed to withstand the world's harshest environments

Industry-leading stentering process provides premium lay flat characteristics

A mid-weight fabric suitable for a wide array of applications and designs