




Pumice



497-0047 White Shore



497-4373 Dusty Olive




497-6533 Hail



497-3260 Seahorse




497-4372 Dusk Green




497-5969 Propeller



497-8279 Summer Melon




497-5203 Sunbeam




497-2818 Blue Ice




497-5394 Pewter Cast



497-6601 Coral Glow




497-8280 Aztec Clay




497-4018 Oar




497-2778 Hightide




497-6534 Anchor Gray




640-0042 Beacon



640-0021 Snow Cap



640-5968 Feather

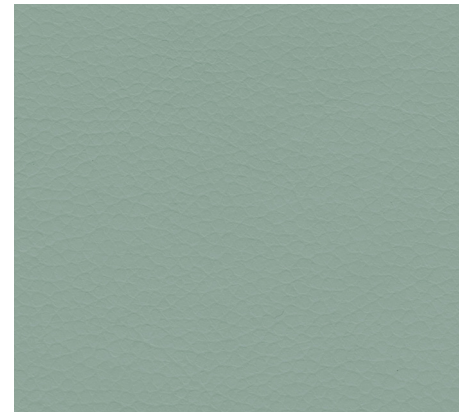


Coast


640-2579 Glacial




640-3890 Cabana




640-3797 Conch




640-6508 Dolphin




640-3837 Bungalow




640-3880 Savanna



640-6086 Walrus Grey




640-2590 Raindrop




640-4338 Stem Green



640-3879 Terra



640-3881 Dusty Earth



640-5381 Black Moor




640-2776 Naval Blue




640-7230 Calypso



Antimicrobial



Outdoor Living



Recycled Bottles & Renewable Fibers

# Pumice & Coast from Ultrafabrics

## Application

Interior Upholstery, Exterior Upholstery

## General Specifications

### Composition:

100% Polycarbonate Polyurethane Surface  
65% Recycled Polyester, 35% Rayon Backing

### Weight:

Approx. 11.2-11.5 oz. Per Square Yard  
Approx. 380-390 Grams Per Square Metre

### Thickness:

Approx. 1.1-1.15 Millimetres

### Width:

54 Inches / 137 Centimetres

### Repeat:

None

## Performance

### Abrasion:

ASTM D4157 / 400,000 Double Rubs (Wyzenbeek)\*  
BS EN ISO 12947-2 / 180,000-200,00 Rubs (Martindale)\*  
\*meets or exceeds

### Hydrolysis:

16 Weeks  
ASTM D3690 Sect. 6.11 (Hydrolytic Stability)  
ISO 1419 Method C (Accelerated Ageing)

Adhesion of Coating: ASTM D751

Tear Strength: ASTM D2261

Breaking Strength: ASTM D751

Seam Strength: ASTM D751 (Tack Tear)

Tensile Strength: BS EN ISO 1421

Antibacterial: AATCC 147

Antimicrobial: ASTM E2180

Anti-mildew: ASTM G21

Cold Crack: FTM 5874 / CFFA 6a

Blocking: ASTM D751, 89-93

## Colorfastness

Light: ASTM G154, 1000 Hours  
SAE J2527 1500 kj, Grade 4  
ISO 105 B02, Grade 8

Crocking: AATCC 8, Grade 4-5 Wet & Dry

Chlorinated Water: AATCC 162, Class 4-5

Perspiration: AATCC 15, Class 5

Sea (Salt) Water: AATCC 106, Class 4-5

## Flammability Requirements

- ASTM E84 (Adhered) - Class A
- CA TB 117-2013 - Pass
- FMVSS 302 - Pass
- NFPA 260 - Class 1
- UFAC - Class 1
- AB 2998

These fabrics, when treated and/or used with other compatible furniture components, have been shown to perform under the fire test conditions of:

- ASTM E84 (Unadhered)
- IMO FTPC Part 8
- BS EN 1021 Parts 1 & 2
- BS 5852 Source 0, 1 & 5 (Cig, Match & Crib 5)

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, please visit our website.

## Miami Corporation

720 Anderson Ferry Rd.  
Cincinnati, OH 45238  
800.543.0448  
miamicorp.com



ultrafabricsinc.com

Ultrafabrics® and logo are registered trademarks of Ultrafabrics Inc. Made in Japan.

