




**WTY24PLS** Black

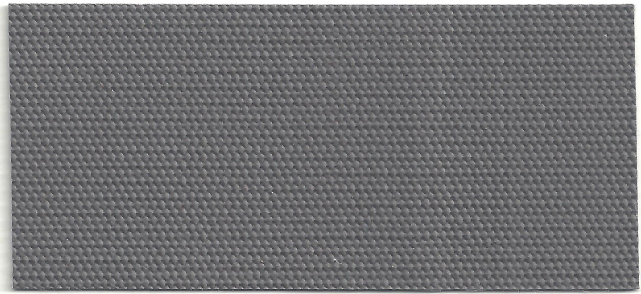


**WTY97PLS** Charcoal\*

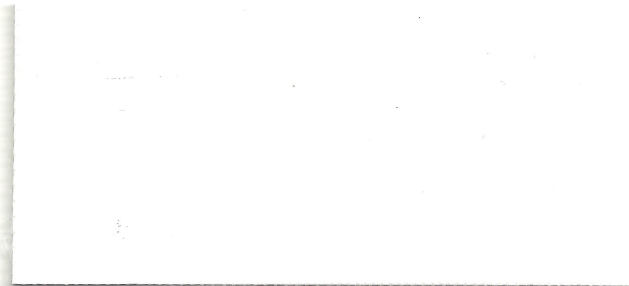


**WTY15PLS** White



**WTY79PLS** Silver\*



**WTY151PLS** Linen




**WTY81PLS** Chocolate\*




**WTY426PLS** Brick\*




**WTY73PLS** Burgundy\*




**WTY11PLS** Red\*




**WTY56PLS** Paris Red\*



**WTY12PLS** Sunflower\*




**WTY6PLS** Pool Green



**WTY5PLS** Forest Green



**WTY75PLS** Navy



**WTY416PLS** Pacific Blue

\*Premium Color





**Weathertyte® +** is the industry's original fabric-look outdoor textile. This premium flame-resistant textured vinyl offers the look of a woven fabric with all the benefits of a commercial vinyl. The Weathertyte® + finish is optimized to receive digital graphics (solvent, UV, and latex printers) along with pressure-sensitive films. Fully waterproof, heat sealable, and stain resistant properties make this the perfect choice for any establishment including retail stores, restaurants, hotels, and public buildings that may require awnings, canopies, walkways, signage, or shade structures. Superior color retention and UV protection with an industry leading 10-year warranty.

### Added Benefits:

- Embossed for textured fabric effect
- Waterproof
- 74" Width
- FR Certified
- Fully graphic and print receptive (paint, screen, digital, PSV)

Coated Fabric	Standard	Metric
Finished Weight	16 oz/yd <sup>2</sup>	542 g/m <sup>2</sup>
Width	74 inches	188 cm
Coating Type	PVC	
Seaming Properties	Dielectric & Thermal	

Material Properties	ASTM Test Methods	Standard	Metric
Tensile Strength, Grab (Warp)	D751	220 lbs	979 N
Tensile Strength, Grab (Fill)	D751	150 lbs	667 N
Tear Strength, Tongue (Warp)	D751	50 lbs	222 N
Tear Strength, Tongue (Fill)	D751	30 lbs	133 N
Screwdriver Puncture	D751	50 lbs	178 N
Ball Puncture	D751	200 lbs	1,068 N
Hydrostatic Resistant	D751	300 psi	1.7 MPa
Abrasion Resistance (H18/1 kg)	D3389	500 cycles	
Low Temperature Bend	D2136	0°F	-17°C
High Temp, Cont/Interm.	D1204	180/200°F	82/93°C
Mildew/Fungus Resistance	G21	No Growth	
Flame Resistance	E84	Class A	
	CSFM	Pass	
	NFPA 701 (Small Scale)	Pass	
	NFPA 701 (Large Scale)	Pass	
	California State Fire Marshall	Pass	

**Custom colors are available upon request.**

The information contained herein or that is supplied by us, or on our behalf, is based upon data obtained through our own research and is considered accurate. However, no warranty is expressed or implied regarding the accuracy of this data, the results obtained from the use thereof, or that any such use will not infringe upon any patent. This information is furnished upon the condition that the person receiving it shall evaluate its suitability for the specific application.

